


1. Wiring Diagram.

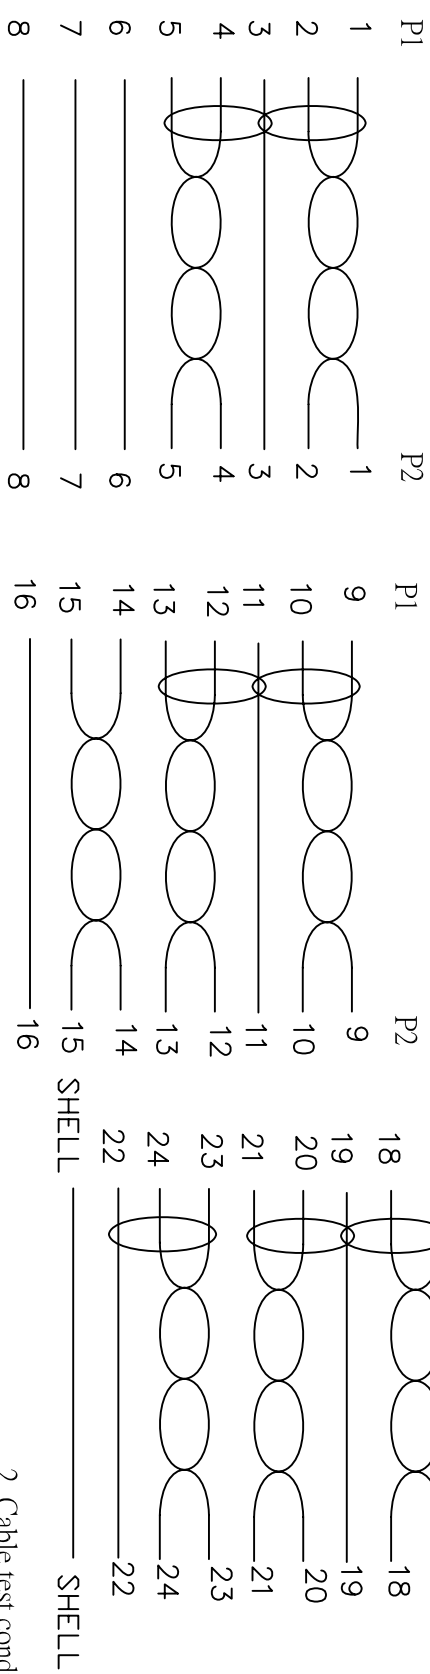

10	TUBE	HEAT SHRINK TUBE OD2.0,mm L:8mm	14	
9	TUBE	HEAT SHRINK TUBE OD1.5,mm L:15mm	8	
8	TUBE	HEAT SHRINK TUBE OD1.0mm L:25mm	2	
7	COPPER	COPPER FOIL W/30mm*L75mm	2	
6	SCREW	#4-40UNC RE34 WHITE	4	
5	PE	LLDPE 500026 6201	20g	
4	PVC	45P PVC WHITE DVERMOLD	50g	
3	FERRITE	OD17.5*L28.5*ID9.5	2	
2	CONN	DVI24+1 MALE G/F INSULATION BLACKSHELL NICKEL PIN G/F	2	P1,P2
1	CABLE	UL20276 (28AWG (7/0.12TC) *IP+D28AWG(7/0.12TC)+AL/MY{*7+28AWG(7/0.12TC)*IP+28AWG (7/0.12TC) *3C+A+B (96/0.12AM) OD8.6 BLACK	1	3000mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF

BILL OF MATERIAL

2. Cable test condition:
 Open/Short :100%
 Insulation resistance:5M ohm
 Contact resistance:2 ohm
 Hipot: DC 300V/1 sec
 3.Each pcs with PE polybage

A	INITIAL RELEASE	2014/08/24
REV/BGN#	DESCRIPTION	DATE
Cnc Tech,LLC		
P/N:	751-10011-00300	REV A
TITLE	CBL DVI24+1 MALE TO VGA 24+1 MALE	
DRAWN	WENC	DATE 08/24/14
CHECKED	EDWIN	DATE 08/24/14
APPROVAL		
CUSTOMER P/N:		
CUSTOMER:		
SHEET	1 OF 1	

