


PIN ASSIGNMENT

P1	Red (Vbus)	A4, A9, B4, B9
P1	Blue (CC)	A5
P1	White (D-)	A6
P1	Green (D+)	A7
P1	Black (GND)	A1, A12, B1, B12
P1	Braid	SHELL

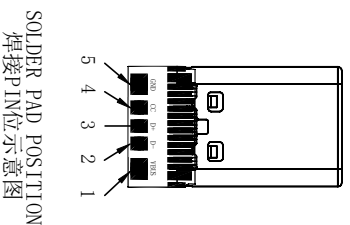


- 一、Electrical character:
- (1) 100% Open & Short Testing
  - (2) Withstanding Voltage:DC 300V, 0. 01s
  - (3) Insulation impedance:  $\geq 10M\Omega$
  - (4) Conduction impedance:  $\leq 0. 4\Omega$
- 二、Rated voltage:5V, Current:3A  
Rated voltage:9V, Current:2A

ITEM	PART No.	NAME	DESCRIPTION	QTY	UNIT
5	ZTPE-101C60	MOLDED	TYPE插头料, 黑色, 85A(45P), UL94-HB, 符合ROHS+HF	N/A	KG
4	PLASTIC-086	MOLDED	LD-PE, 透明	N/A	KG
3	ZTC01M02SPT1	SHEILD	TYPE C EMI Shell, SUS304, T=0. 25mm, 镀镍, (L=13. 90*H3. 60*W9. 00), 带铆爪.	2	PC
2	ZTC22MG024SX01Z0	CONN	TYPE C/M, 24pin, pin针镀金, 黑色胶芯, 外壳镀镍, 一体拉伸式, 超薄款	2	PC
1	C000020C11L-4C	CABLE	USB2. 0 30AWG/2C+30AWG/1C+20AWG/1C+P+EAB OD:4. 0mmTYPE 黑色	2. 0	M

MATERIAL SPECIFICATION

REV	NAME	DATE	REVISIONS	DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION	CUST. CODE
4									
3									
2								TYPE CM 10 CM Cable ASSY	
SYM								SHEET: 1 OF 1	
								DRAWING No. D000073A	
								Cvilux P/N DH-20UE0064-NH	CUSTOMER P/N



瀚笙股份有限公司  
Cvilux Corporation