
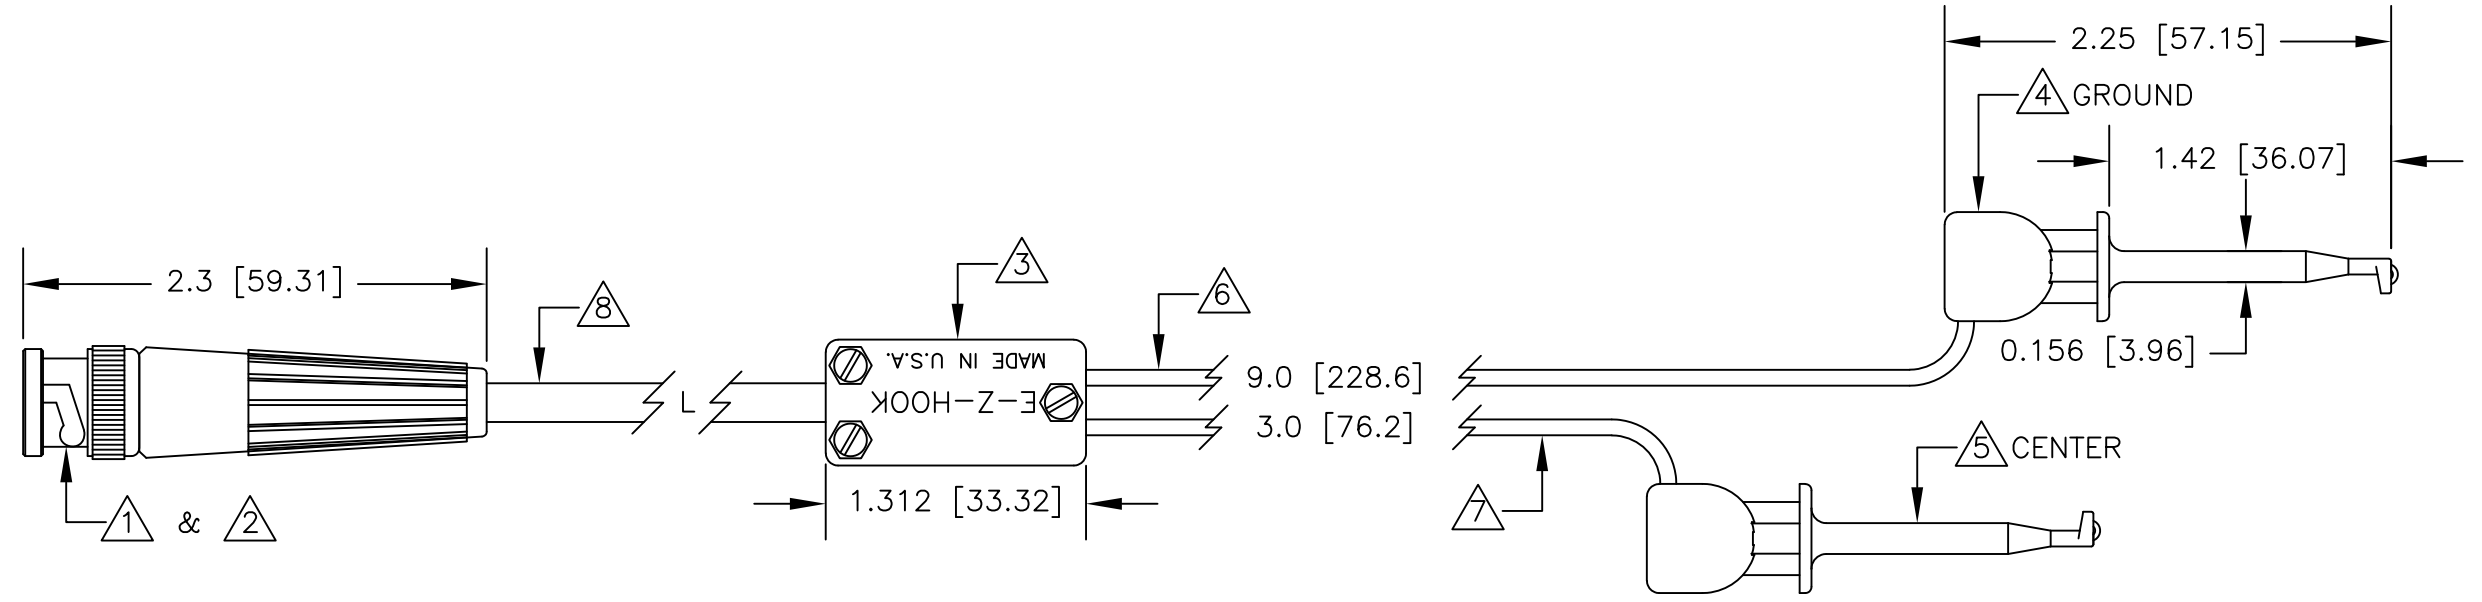


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
GASKET: RED RUBBER
2. P/N: SR58BLK
BOOT: BLK MOLDED PVC
3. P/N: Y-1000
HOUSING: BLK MOLDED NYLON
HARDWARE: SS SCREW, NUTS & WASHER
4. P/N: XRBLK
HOUSING: BLK MOLDED NYLON.
CONTACT: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
5. P/N: XRRED
HOUSING: RED MOLDED NYLON.
CONTACT: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
6. P/N: W-500/0
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION
7. P/N: W-500/2
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION
8. P/N: C-1000/0
20AWG RG58C/U CABLE
0.195 [4.95] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

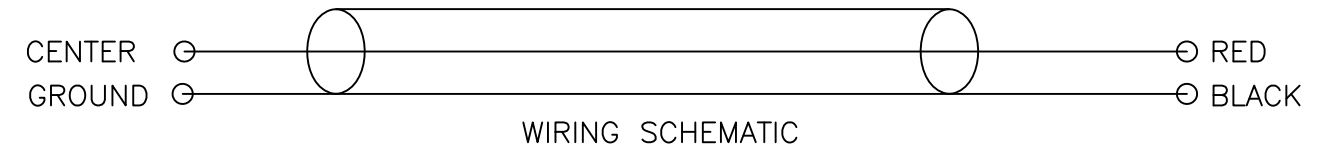

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
		APPROVALS	DATE	
MATERIAL SEE NOTE		DRAWN	R.L.	DESCRIPTION BNC MALE TO XR MINI HOOK LEADS, RG58 CABLE
		APPROVED BY		
FINISH SEE NOTE		SIZE	CODE IDENT NO.	DRAWING NO.
		NEXT ASSY		USED ON
APPLICATION		DO NOT SCALE DRAWING		SCALE 1:1
				SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.