


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.9595, GC	10/23/06	HM
B	UPDATE O/P CONNECTOR DIMENSION 10.5±0.5 TO 9.0±0.5 mm, RFS.27618, HM	03/19/21	MK
B1	CLARIFY PINOUT TO Black: Pin 1 (+), Black W/ Stripe: Pin 2 (-), RFS.27713	04/11/22	MK

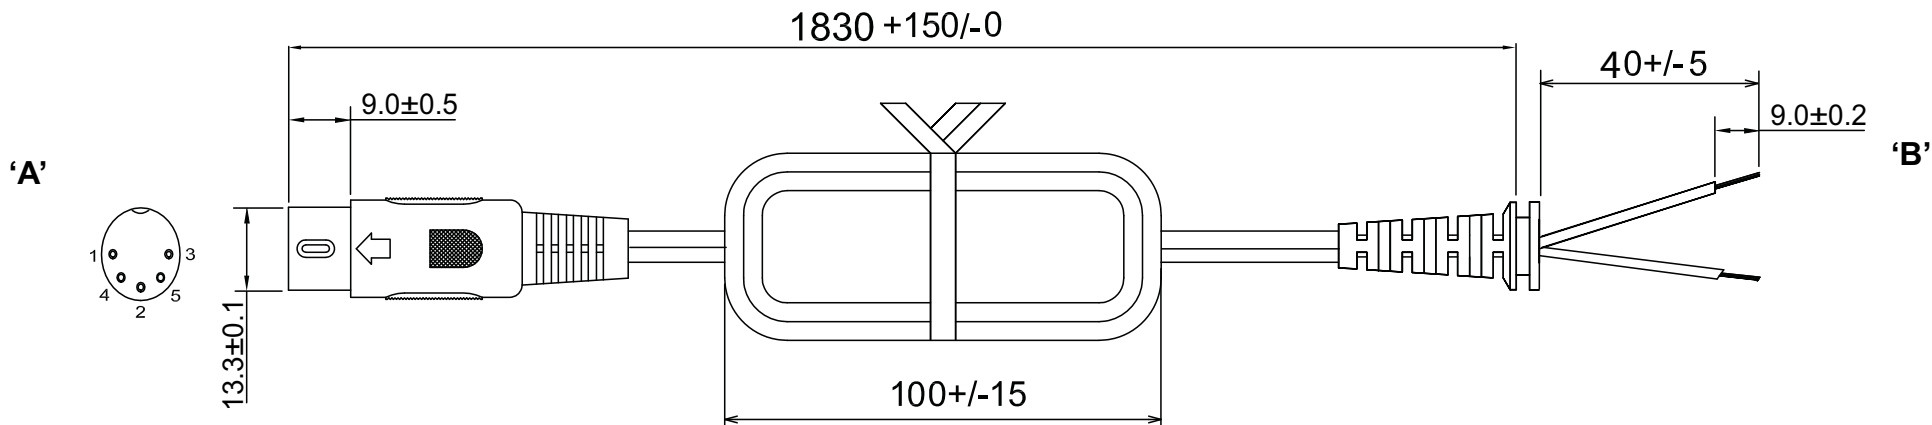

Black: Pin 1 (+)
 Black W/ Stripe: Pin 2 (-)
 PIN 3,4,5: N/C

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
 CABLE TYPE / SIZE: SPT-1, 18 AWG X 2C
 TEMPERATURE RATING: 60°C MIN.
 CONDUCTOR COLORS: BLACK / BLACK W/STRIPE
 OVERALL LENGTH (L): 1830+150,-0 mm
 END 'A' TERMINATION: 5 PIN MALE DIN PLUG
 END 'B' TERMINATION: STRAIN RELIEF
 APPROVALS CABLE: UL, CSA or cUL

NOTES:

1. CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: GC	DATE: 10/23/06	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET		
DRAWN: NF	DATE: 10/23/06	FSCN No.: G, CC, YL	SIZE A	MODEL: N / A
APRVD: HM	DATE: 10/23/06	SCALE: NONE	PART NO: N052186F00	
				REV. B1
				SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice