



**Trash receptacle with liner**  
Receptacle sold separately

Item No.	Size (in.) W x L	Gallon Size
<a href="#">37822</a>	26" x 26"	10
<a href="#">37823</a>	36" x 40"	36

Dimensional tolerances are  $\pm 1/4$ " unless specified.  
Packaged 50 per pack

**RoHS, REACH and Conflict Minerals Statement**

See the Desco Industries RoHS, Reach and Conflict Minerals Statement:  
<http://www.descoindustries.com/ROHS3.aspx>

See the Protektive Pak Limited Warranty:  
<http://protektivepak.descoindustries.com/Limited-Warranty.aspx>

**Description**

Protektive Pak Pink Poly Trash Receptacle Liners are made from light pink transparent low density polyethylene, and include an antistat that is integral to the film material. These liners have low charging (antistatic) properties so that electrostatic charges are removed to ground when a liner is grounded. The Liners are ideal for use in ESD protected areas, and are available in two sizes: 10 and 36 gallons. Protektive Pak Pink Poly Trash Receptacle Liners meet ANSI/ESD S20.20 and ANSI/ESD S541 requirements.

*"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity." [ESD Handbook ESD TR20.20-2008 section 2.4 Sources of Static Electricity]*

**Specifications**

**Electrical Properties**

Static Decay  
Surface Resistance  
Polycarbonate Haze  
Corrosivity Observations

**Typical Values**


< 1.0 sec.  
 $1 \times 10^4$  to  $< 1 \times 10^{13}$  ohms  
NE  
NE

**Test Procedures/Method**

ASTM 101 Method 4046  
ANSI/ESD STM11.11  
72 hr contact  
MIL-STD-3010, M3005

**Physical Properties**

Thickness	2 mil (.002") nominal, $\pm 10\%$	
Melt Index	0.050 gm/10 min	ASTM D-1238
Density	0.923 gm/cc	ASTM D-1505
Dart Impact	230 gms	ASTM D-1709
Coefficient of Friction	MD 24,000 psi	ASTM D-1894 (unmodified film)
1% Secant modulus (Stiffness)	MD 25,000 psi	ASTM D-882

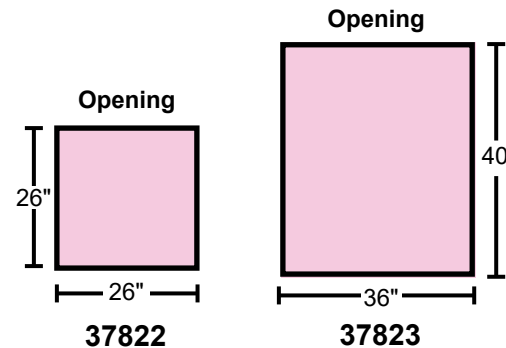

Made in the United States of America

Specifications and procedures subject to change without notice

Unless otherwise noted, tolerance is  $\pm 10\%$

**TRASH RECEPTACLE LINER, PINK POLY**

**PROTEKTIVE PAK**

PROTEKTIVE PAK  
13520 MONTE VISTA AVENUE, CHINO, CA 91710  
PHONE (909) 627-2578  
[ProtektivePak.com](http://ProtektivePak.com)

**DRAWING NUMBER**  
37822

**DATE:**  
October  
2018