

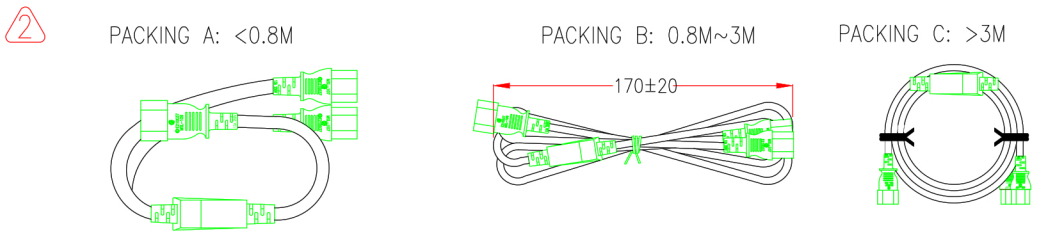


P1: M-004  
 P2,P3: M-005  
 P4: M-008

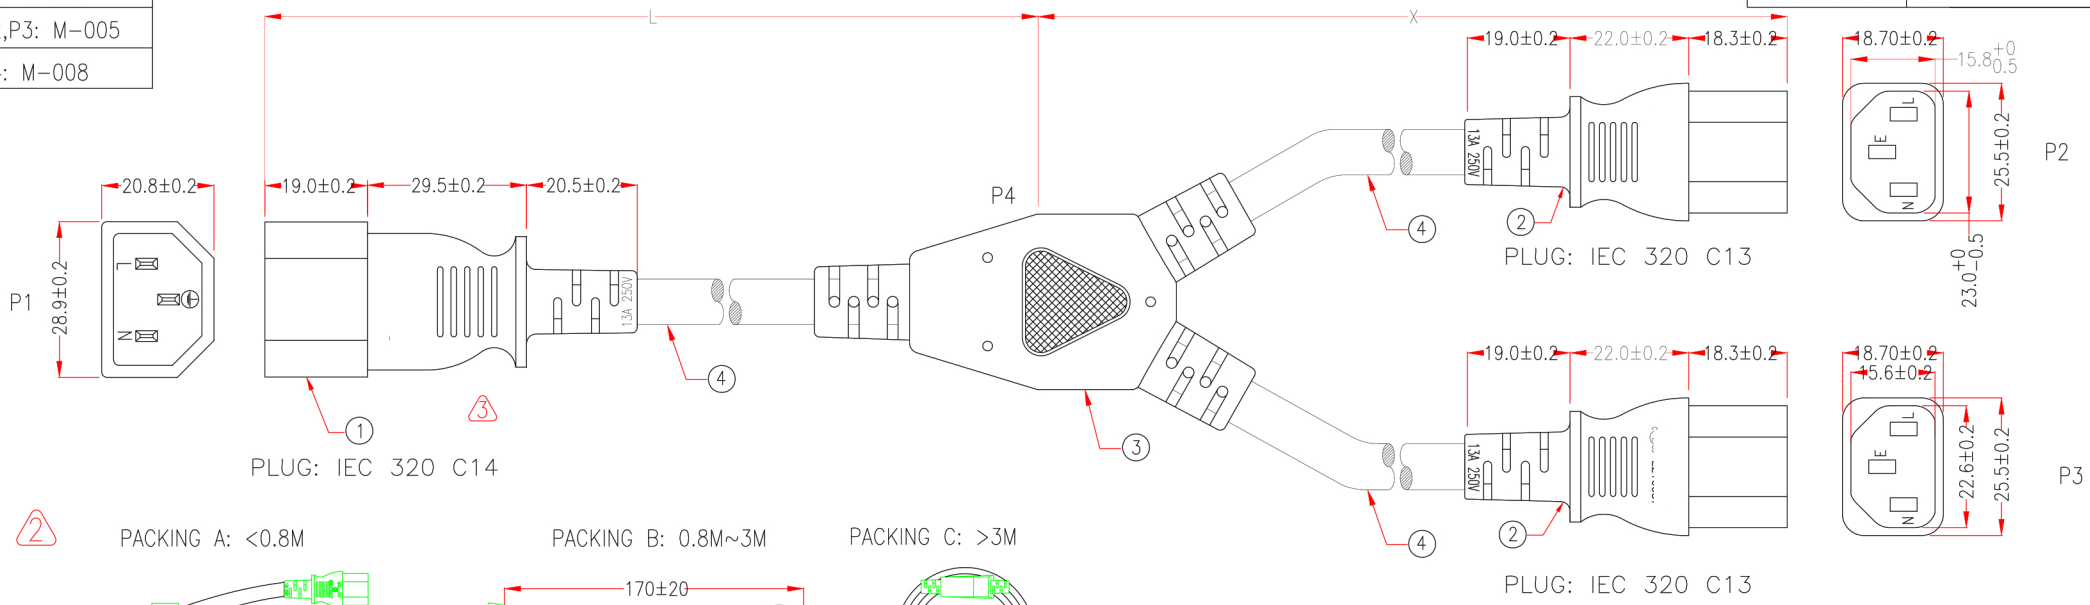

⚠ P1,P2,P3: cULus E210037  
 ⚠ P4: UL E210037

\*NOTE: ALL relevant materials are complied with RoHS directive.  
 THE MARKING IS CONCAVE LETTERING MOULD

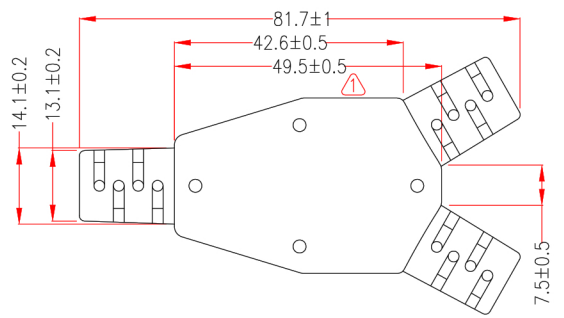

MARKING:  
 (UL) SJT 3/C 16AWG(1.31MM<sup>2</sup>) VW-1 105°C 300V E204978 CSA  
 SJT 3/C 1.31MM<sup>2</sup>(16AWG) FT2 105°C 300V 204790 MSL

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

No.	DESCRIPTION	Q'TY	Supplier
4	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No. EPSVT011603C-059	Lmm*1PCS Xmm*2PCS	M304
	MOLDED PVC 35P, COLOR BLACK		M304
3	BRACKET: YS-021	1	M767
	TERMINAL: 96146BS-0	3	M257
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-003	2	M767
1	TERMINAL: 2*4mm 98744BS-0/A	6	M257
	MOLDED PVC 35P, COLOR BLACK		M304
1	BRACKET: YS-014	1	M767
	TERMINAL: 2x4mm 98672BS-1	3	M257

APPROVED

CHECKED HU 18/AUG/17 DRAWN NAME POWER SUPPLY CORDS & CORDS SETS

DRAWING XU 18/AUG/17 PRODUCT NO. PWCD-C13X2C14-13A-03F-BLK

**Unirise**

Cable Length Unless Other Spec. Tolerances:  
 0 ~200mm ±10mm  
 201~1000mm ±20mm  
 1001 ~1500mm ±25mm  
 1501~2100mm ±30mm  
 2100mm± ±40mm

UNIT: mm

REV.3 2017.08.18 MODIFY CABLE MOLDED & MOLDED GOLO  
 REV.1 2016.04.11 MODIFY P4 LOGO REV.2 2016.08.01 MODIFY PACKING  
 NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm