
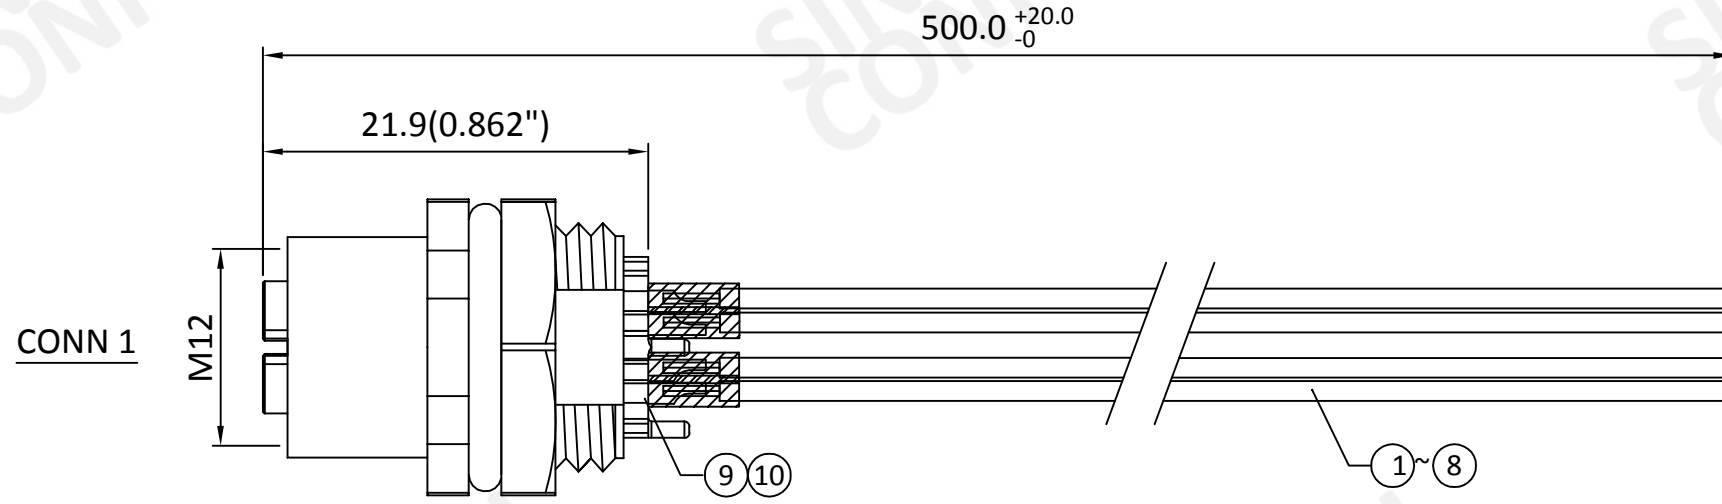


REV.	ECN NO.	DATE	BY	DESCRIPTION
01		Sep/03/2020	Aine Li	RELEASED

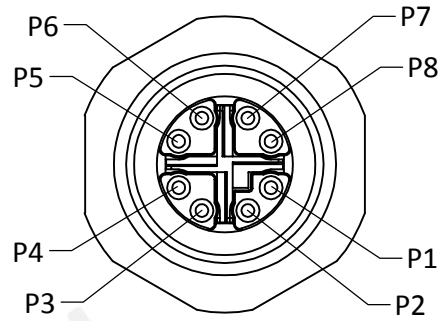

WIRE RUN LIST		
AWG	CONN 1	COLOR
24	1	BROWN
	2	WHITE
	3	BLUE
	4	BLACK
	5	GRAY
	6	GREEN
	7	YELLOW
	8	ORANGE

ITEM	QTY	DESCRIPTION
10.	A/R	HEAT SHRINK TUBE,UL224,1Q,BLACK,ID=1.3,T=0.2(A5340000000SD)
9.	1	M12 CONN., X-CODE, FEMALE, 8P(A30150209001SD)
8.	A/R	HOOK-UP WIRE, UL1213 #24, WHITE, OD=0.98, PTFE (A10902921001SD)
7.	A/R	HOOK-UP WIRE, UL1213 #24, BLACK, OD=0.98, PTFE (A10902920001SD)
6.	A/R	HOOK-UP WIRE, UL1213 #24, GREEN, OD=0.98, PTFE (A10902916001SD)
5.	A/R	HOOK-UP WIRE, UL1213 #24, YELLOW, OD=0.98, PTFE (A10902917001SD)
4.	A/R	HOOK-UP WIRE, UL1213 #24, ORANGE, OD=0.98, PTFE (A10902918001SD)
3.	A/R	HOOK-UP WIRE, UL1213 #24, BROWN, OD=0.98, PTFE (A10902919001SD)
2.	A/R	HOOK-UP WIRE, UL1213 #24, GRAY, OD=0.98, PTFE (A10902913001SD)
1.	A/R	HOOK-UP WIRE, UL1213 #24, BLUE, OD=0.98, PTFE (A10902912001SD)

NOTES:

- TESTING SPEC.:  
COND. RESISTANCE: 3Ω MAX.  
INSUL. RESISTANCE: 10MΩ MIN.  
TESTING VOLTAGE: 200V DC
- IP67 WHEN MATED.
- FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
- RoHS COMPLIANCE.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : <b>DigiKey</b>		REV. : N/A		 SINBON Electronics Co., Ltd.	
CUSTOMER P/N : N/A		DRA. : Sep/03/2020 Aine Li			
UNLESS OTHERWISE SPECIFIED TOLERANCE :				DESCRIPTION :	
1 ~ 10 : ±1 11 ~ 30 : ±2 31 ~ 50 : ±3 51 ~ 200 : ±5 201 ~ 400 : ±7 > 401 : ±10 ANGLES : ±1°				8P female rear, X code IP67, 500mm	
DRA. : Sep/03/2020 Kevin Qiu				PART NUMBER : M12X-08PF0-UL24N05	
APR. : Sep/03/2020 Kevin Qiu				REV. : 01	
SIZE : A3		UNIT : mm		SCALE : NONE	
SHEET : 1 of 1					