

**QMQF576 Series Temperature Compensated Crystal Oscillators (TCXOs)**  
**QVMQF576 Series TCXOs with Voltage Control Function (VCTCXOs)**



**MERCURY**  
Since 1973

**QMQF576** and **QVMQF576** are QuikXO™ (quick-turn delivery) versions of the MQF576 (a TCXO) and VMQF576 (a VCTCXO) series, respectively. QuikXO™ products, either standard or custom frequencies are produced and shipped from California USA in 3 to 5 days and available at Mercury eCommerce. They are 7.0x5.0x2.5 mm SMD, the supply voltage can be either 2.5 V or 3.3 V and output logics include differential LVPECL or LVDS (up to 1.5 GHz). The 0.8 ~ 1.6 ps typical phase jitter and lower current consumption (43 mA typical for LVPECL 622.080 MHz at 3.3 V) compared to competitions make the series ideal for multimedia, Ethernet, and networking applications.



**Relevant Categories:**

- For lower cost with regular lead time, please refer to the non- QuikXO™ equivalent the **MQF576** and the **VMQF576** series
- For lower phase noise and phase jitter (0.6 p. sec. typical), please refer to the **MQN576** and **VMQN576** series.
- For smaller footprint, 3.2 x 2.5 x 1.6 mm 6-pad SMD, with the same electrical performance, please refer to the **MQF326**, and the **VMQF326** series.

**General Specifications:** at Ta = +25°C

Output Logic Type	LVPECL (code "P")		LVDS (code "D")	
TCXO Models	<b>QMQF576P25</b>	<b>QMQF576P33</b>	<b>QMQF576D25</b>	<b>QMQF576D33</b>
VCTCXO Models	<b>QVMQF576P25</b>	<b>QVMQF576P33</b>	<b>QVMQF576D25</b>	<b>QVMQF576D33</b>
Frequency Range	10 ~ 1500 MHz		10 ~ 1500 MHz	
Supply Voltage (V <sub>DD</sub> )	+2.5 V ±5%	+3.3 V ±5%	+2.5 V ±5%	+3.3 V ±5%
	Code " <b>25</b> "	Code " <b>33</b> "	Code " <b>25</b> "	Code " <b>33</b> "
Current Consumption (mA; typical)	18 MHz: 28	18 MHz: 35	11 MHz: 19	11 MHz: 22
	156 MHz: 30	156 MHz: 38	190 MHz: 23	155.5 MHz: 26
	622 MHz: 33	622 MHz: 43	390 MHz: 24	250 MHz: 28
	1289 MHz: 37	1289 MHz: 51	1289 MHz: 31	1080 MHz: 32
	1500 MHz: 43	1500 MHz: 52	1500 MHz: 34	1500 MHz: 35
Load; typical	50 Ω into Vcc - 2.0 V or Thevenin equivalent		100 Ω across the outputs	
Output "High" Voltage; (V <sub>OH</sub> )	V <sub>DD</sub> -1.03 V min.; V <sub>DD</sub> -0.6 V max.		1.4 V typical; 1.6 V max.	
Output "Low" Voltage; V <sub>OL</sub>	V <sub>DD</sub> -1.85 V min.; V <sub>DD</sub> -1.6 V max		1.1 V typical; 0.9 V min.	
Rise Time (Tr) / Fall Time (Tf)	0.2 nS Typ.; 0.5 nS max. (20% ↔ 80% waveform)		0.2 nS Typ.; 0.4 nS max. (20% ↔ 80% waveform)	



**MERCURY** [www.mercury-crystal.com](http://www.mercury-crystal.com)

Taiwan: TEL (886)-2-2406-2779, e-mail: [sales-tw@mercury-crystal.com](mailto:sales-tw@mercury-crystal.com)

U.S.A.: TEL (1)-909-466-0427, e-mail: [sales-us@MercuryUnited.com](mailto:sales-us@MercuryUnited.com)

<b>Additional Output AC Characteristics for LVDS output (LVDS only)</b>	Differential Output Voltage ( $V_{OD}$ ): 175 mV min.; 350 mV typical $V_{OD}$ Magnitude Change ( $\Delta V_{OD}$ ): 50 mV max. Offset Voltage ( $V_{OS}$ ): 1.25 V typical $V_{OS}$ Magnitude Change ( $\Delta V_{OS}$ ): 50 mV max.											
<b>Frequency Stability vs</b>	Operating Temperature	$\pm 2.0$ ppm over $-40$ to $+85^{\circ}\text{C}$ . Spec. code: " <b>2.0A</b> ".										
		$\pm 2.5$ ppm over $-30$ to $+85^{\circ}\text{C}$ . Spec. code: " <b>2.5B</b> ".										
		Custom specification: The code is replaced with a control number assigned by Mercury										
	Voltage Change	$\pm 0.2$ ppm max. for a $\pm 5\%$ input voltage change										
	Load Change	$\pm 0.2$ ppm max. for a $\pm 10\%$ load condition change										
	Aging at $T_a = +25^{\circ}\text{C}$	$\pm 2$ ppm max. first-year; $\pm 10$ ppm max. over 10 years										
	Reflow	$\pm 1.0$ ppm max., one reflow and measured 24 hours afterward.										
<b>Initial Calibration Tolerance (Initial Frequency Accuracy)</b>	$\pm 1.0$ ppm typical; $\pm 2.0$ ppm max. at $+25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ .											
<b>Duty Cycle</b>	50% $\pm 5\%$ . At 50% $V_{DD}$ .											
<b>Current with Output Disabled</b>	18 mA typical											
<b>Start-up Time</b>	5 m. sec. max.											
<b>Output Enable Time</b>	200 ns max.				Output Disable Time				50 ns max.			
<b>Single Side-band Phase Noise (dBc/Hz; typical)</b>	Frequency (MHz)	<b>25</b>	<b>49.152</b>	<b>50</b>	<b>100</b>	<b>156.250</b>	<b>600</b>	<b>1030</b>	<b>1080</b>	<b>1270</b>	<b>1450</b>	
	Supply Voltage	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	
	Output Logic	P	D	D	D	P	P	P	D	D	D	
	Offset	10 Hz	-61	-85	-80	-73	-63	-59	-53	-49	-49	-52
		100 Hz	-106	-108	-103	-96	-91	-81	-75	-81	-78	-78
		1 kHz	-125	-121	-117	-109	-109	-96	-93	-93	-91	-89
		10 kHz	-132	-126	-124	-119	-115	-102	-94	-98	-94	-92
		100 kHz	-133	-127	-127	-120	-116	-104	-97	-99	-97	-94
		1 MHz	-151	-146	-145	-138	-137	-125	-119	-120	-117	-118
		5 MHz	-153	-154	-148	-143	-147	-132	-129	-128	-128	-129
10 MHz		-	-157	-150	-145	-150	-136	-133	-133	-133	-133	
20 MHz	-	-160	-152	-144	-155	-139	-	-142	-142	-		
<b>Integrated Phase Jitter, RMS 12 kHz to 20 MHz; picosecond</b>	1.0	1.0	1.1	1.3	1.1	1.1	1.4	1.1	1.2	1.4		
<b>Control Voltage Function on Pad 1 (VCTCXOs only)</b>												
<b>Control Voltage (<math>V_{control}</math>)</b>	$V_{control}$ center and range: $+1.5\text{ V} \pm 1.0\text{ V}$ . For both 2.5 $V_{DD}$ and 3.3 $V_{DD}$											
<b>Frequency Pulling Range</b>	High pull: $+8$ ppm min. for $V_{control}$ from 1.5 V to $+2.5\text{V}$ Low pull: $-8$ ppm min. for $V_{control}$ from 0.5 V to $+1.5\text{V}$											
<b>Linearity</b>	$\pm 5\%$ typical. $\pm 10\%$ max.											
<b>Transfer Function</b>	Positive Transfer											
<b>Input Impedance</b>	500 K $\Omega$ min.											
<b>Bandwidth</b>	10 kHz min. Measured at $-3\text{ dB}$ .											
<b>Tri-State function on Pad 2</b>												
<b>Output Enable (OE) Control</b>	70% of $V_{DD}$ (min.) to enable output. CMOS level. Do not leave this pin floating. If no connection is desired, please contact Mercury.											
	30% of $V_{DD}$ (max.) to disable the output. Output is high impedance.											
<b>Output Enable Time</b>	200 n. sec. max.											
<b>Output Disable Time</b>	50 n. sec. max.											

### Absolute Maximum Rating:

<b>Input Voltage</b>	-0.5 V to $V_{DD} + 0.5$ V
<b>Output Voltage</b>	-0.5 V to $V_{DD} + 0.5$ V
<b>Positive Supply Voltage</b>	4.2 V
<b>Electrostatic Discharge (ESD)</b>	Human Body Model (HBM): Exceeds 2000 V. Class 2 per MIL-STD-1686C
	Machine Model (MM): Exceeds 120 V. Class M2 per MIL-STD-1686C. Note: Power, ground, and outputs are 200 V.
	Charged-Device Model (CDM): Exceeds 2000 V. Class C6 per MIL-STD-1686C

### Environmental Performance Specifications


<b>Green Requirement</b>	RoHS compliant, Pb (lead) free per EU Directive 2002/95/EC 6/6 (2002/95/EC) and WEEE (2002/96/EC). Free of halide, cadmium, hexavalent chromium, lead, mercury, PBB's, and PBDE's.
<b>Moisture Sensitivity Level</b>	Level 2 per IPC/JEDEC J-STD-020D.1
<b>Storage temperature range</b>	-55 to +125°C
<b>Humidity</b>	85% RH, 85°C, 48 hours
<b>Fine Leak / Gross Leak</b>	MIL-Std-883, method 1014, condition A / MIL-Std-883, method 1014, condition C
<b>Solderability</b>	MIL-STD-202F method 208E
<b>Reflow</b>	260°C for 10 sec. 2X.
<b>Vibration</b>	MIL-STD-202F method 204, 35G, 50 to 2000 Hz
<b>Shock</b>	MIL-STD-202F method 213B, test condition. E, 1000GG ½ sine wave
<b>Resistance to Solvent</b>	MIL-STD-202, method 215
<b>Temperature Cycling</b>	MIL-STD-883, method 1010
<b>Pad Surface Finish</b>	Gold (0.3 um to 1.0 um) over nickel (1.27 um to 8.89 um)

### Part Number Format and Examples:


Example 1: QVMQF576D33-2.0A-622.080;      Example 2: QMQF576P25-2.5B-148.500;  
 Example 3: QMQF576P33-xxxx-155.520

QVMQF	576	D	33	-	2.0A	-	622.080
QMQF	576	P	25	-	2.5B	-	148.500
QMQF	576	P	33	-	xxxxx	-	155.520
Product Series "QMQF": TCXO "QVMQF": VCTCXO	Package Code "576": 3.2x2.5 mm 6-pad SMD	Output Logic "P": LVPECL "D": LVDS	Supply Voltage "33" for 3.3V "25" for 2.5V	-	"2.5B": The freq. stability is ±2.5 ppm over -30 to +85°C "2.0A": The freq. stability is ±2.0 ppm over -40 to +85°C "xxxxx": Custom frequency stability. A control number assigned by Mercury.	-	The nominal Frequency in MHz. 3 places or more after the decimal.

**Output OE Function on pad 2** Note: Do not leave this pad floating. If “no-connection” is desired, please contact Mercury.

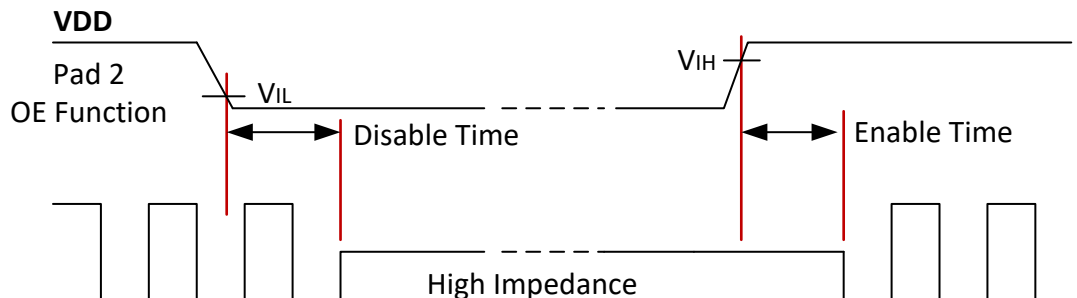


**Phase Noise Plot of QMQF576P33-156.250 MHz,  $V_{DD} = +3.3V$ , LVPECL**

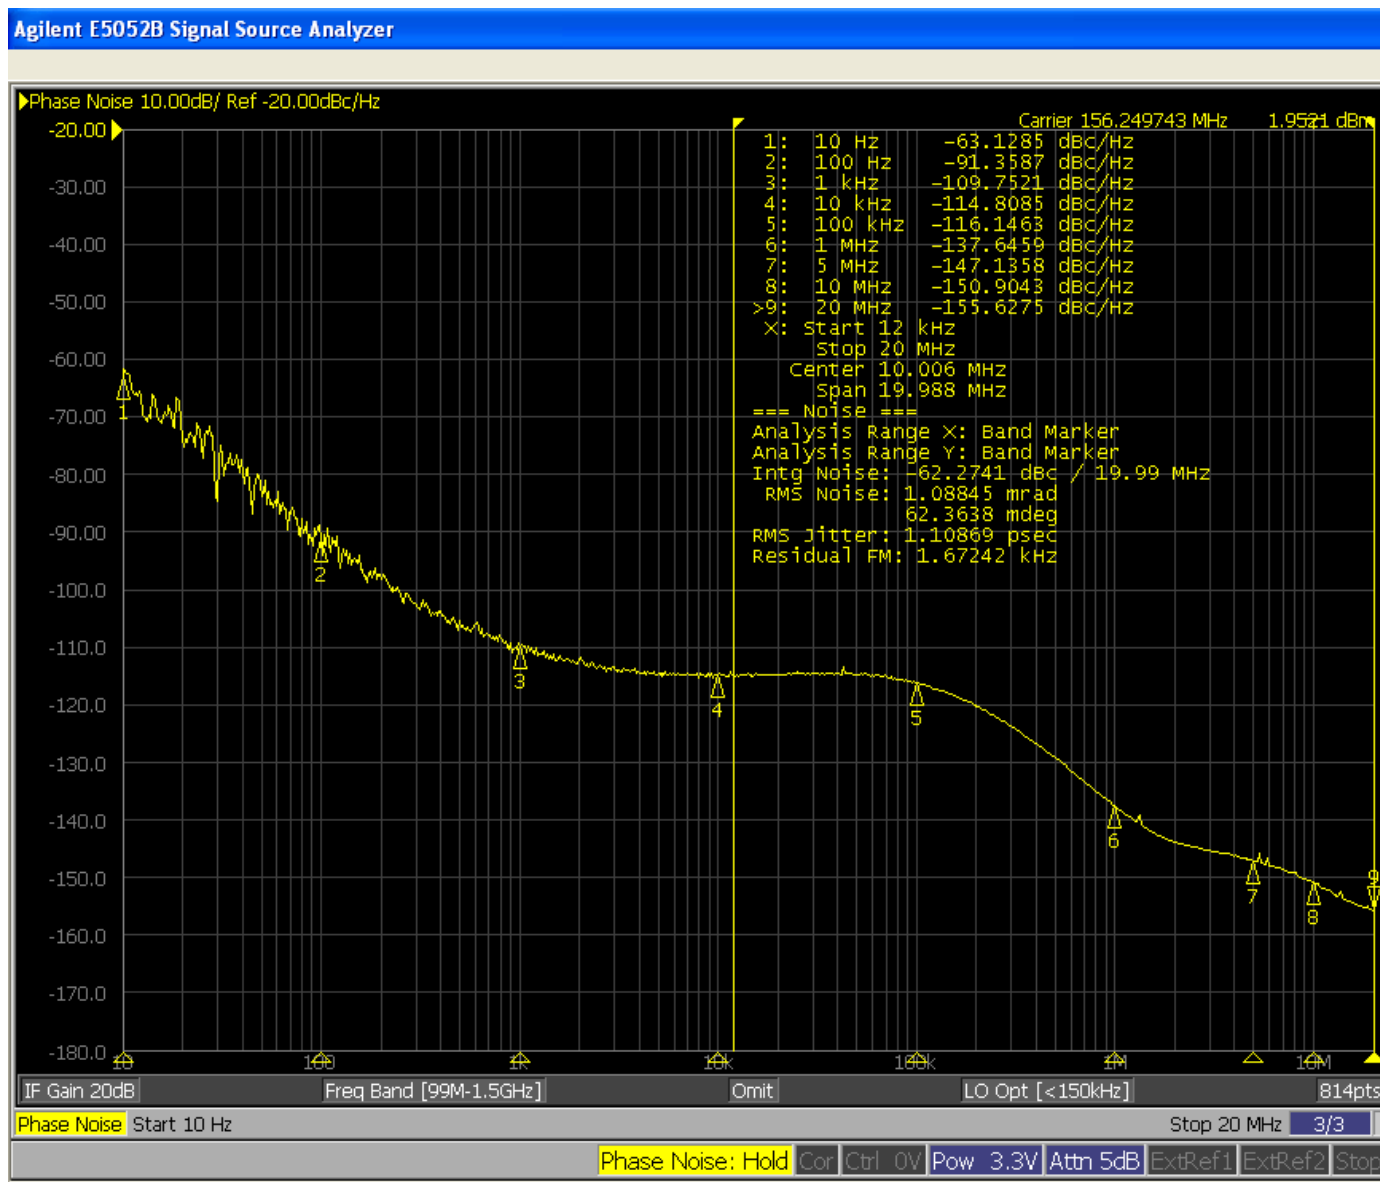


**Package Dimensions and Recommended Solder Pad Layout**

unit: (mm)


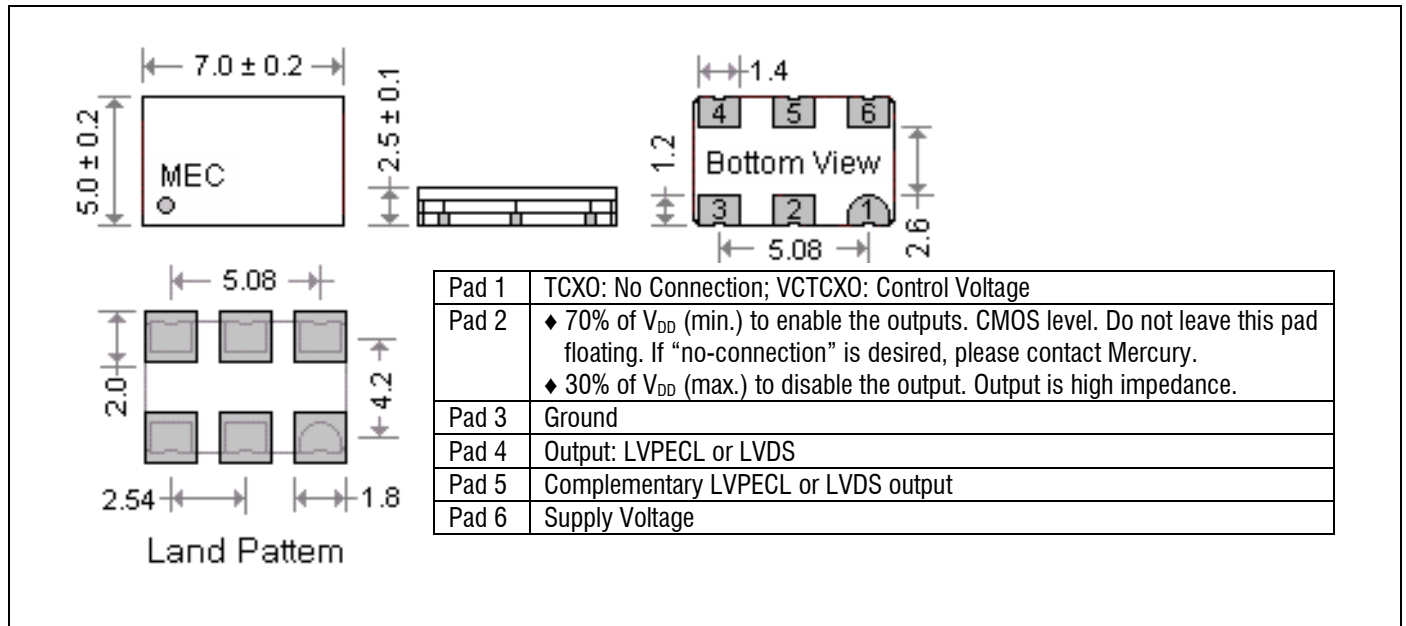


**Test Circuits and Output Waveforms**


Duty cycle =  $\left(\frac{T1}{T2}\right) * 100\%$ . Measured at 50% V<sub>DD</sub>

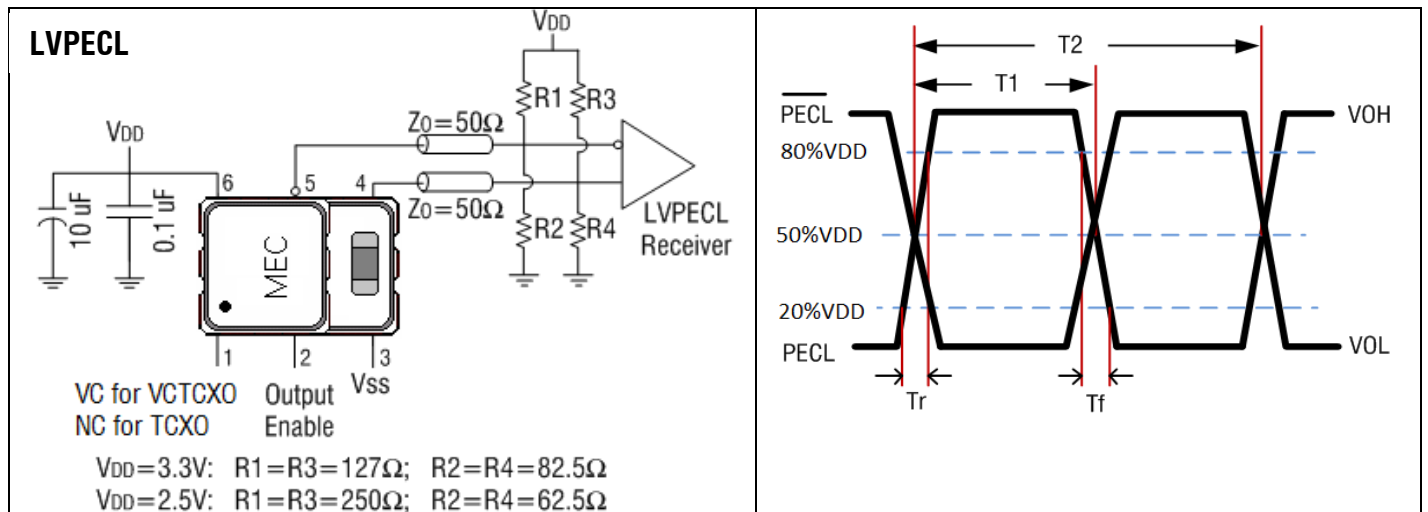

**LVDS**

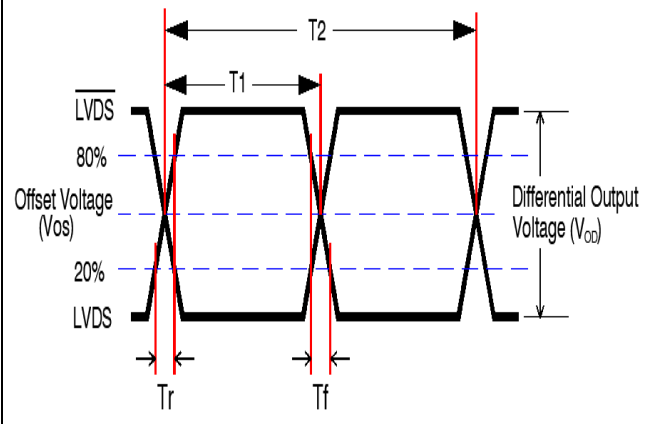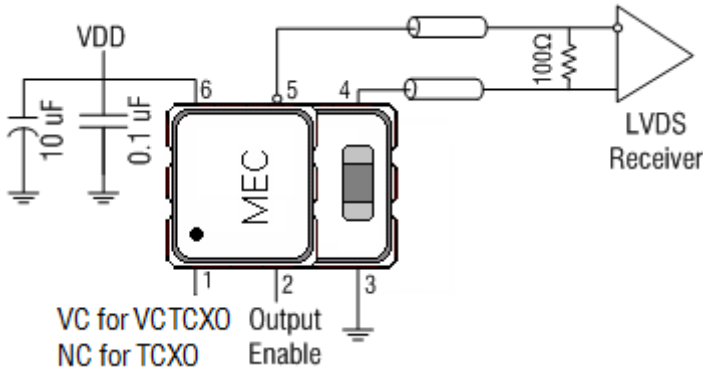

**Recommended Solder Reflow Profile** (per IPC/JEDEC J-STD-020D.1)

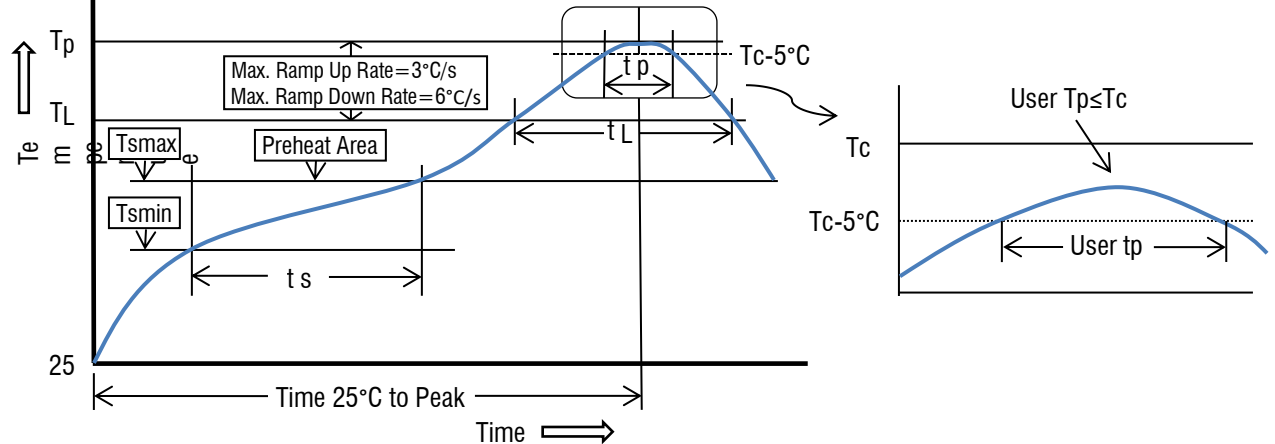

Profile Feature	Sn-Pb Eutectic Assembly	Pb-free Assembly
Preheat/Soak		
- Temperature min. (Ts min.)	100°C	150°C
- Temperature max. (Ts max.)	150°C	200°C
- Time (ts) (Ts min. to Ts max.)	60 to 120 seconds	60 to 180 seconds
Ramp-up rate (T <sub>L</sub> to T <sub>p</sub> )	3°C / sec. max.	3°C / sec. max.
Liquidous temperature (T <sub>L</sub> )	183°C	217°C
Time (t <sub>L</sub> ) maintained above T <sub>L</sub>	60 to 150 seconds	60 to 150 seconds
Peak package body temperature (T <sub>p</sub> )	235°C	260°C
Time (T <sub>p</sub> ) within 5°C of the classification temperature T <sub>c</sub>	10 to 30 seconds	20 to 40 seconds
Ramp-down rate (T <sub>p</sub> to T <sub>L</sub> )	6°C / second max.	6°C / second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

All temperatures refer to the topside of the package, measured on the package body surface.